


WOODEN ACOUSTIC DOOR

SPECIFICATIONS

Supply of Pacific Make Acoustic door with the following specification. Door frame made out hardwood Red Meranti/teakwood of minimum size 145x70mm with perimeter seal provided in grooves on all three sides of the frame for sound insulation. door shutter of 75mm +2mm thickness, with comprising of 100x68mm hardwood internal timber frame work, with infill 40mm thick rock wool insulation with 3mm thick rubber sheet for extra sound insulation, the insulation shall be sandwiched between 2nos 12mm thick non-combustible boards, clad with 4mm thick commercial ply on both sides of shutter with expose/concealed lipping all around the shutter. The shutter shall be fixed with the frame with the help of SS 304 grade ball bearing hinges(to be paid separately) of minimum size 100x89x3mm of approved quality with necessary screws. Provisions/ reinforcement for fixing all fixtures shall be build on the door prior to the supply, final finish of shutter shall be paint/laminate/ veneer of approved brand and manufacture and door frame finished with paint/polish as per direction of Engineer- incharge.

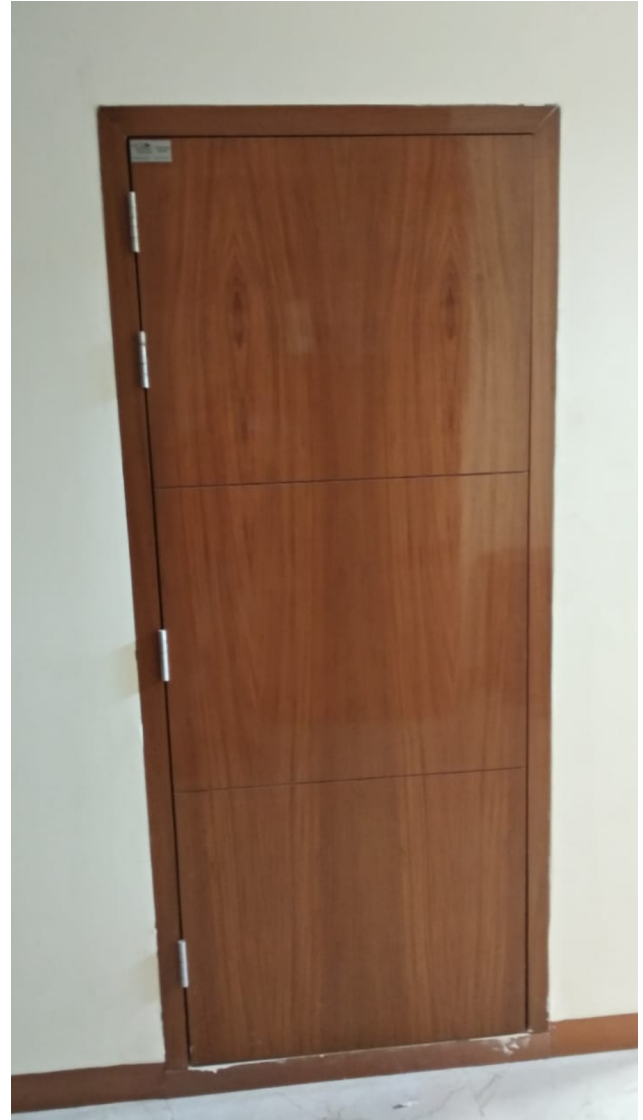

ESTABLISHED IN 1987



**INDIA'S LEADING
FIRE-RATED DOORS
MANUFACTURER**